

**Performance specification**

Satellite signals tracked simultaneously	GPS: L1C/A, L1C, L2P(Y), L2C, L5
	GLONASS: L1, L2, L3
	BEIDOU: B1I, B2I, B3I, B1C, B2a, B2b
	GALILEO: E1, E5a, E5b, E6
	QZSS: L1, L2, L5, L6
	SBAS: L1, L5
	IRNSS: L5
Channels	1408 tracking Channels
Cold start	<60 s
Hot start	<15 s
Positioning output rate	1Hz - 20Hz
Signal Reacquisition	<1s
RTK Initialization time	<10s
Initialization Reliability	>99.99%
Time accuracy	20 ns

**Positioning<sup>1</sup>**

Code differential GNSS positioning	Horizontal: 0.25 m + 1 ppm RMS
	Vertical: 0.50 m + 1 ppm RMS
	SBAS differential positioning accuracy <sup>2</sup> : typically <5m 3DRMS
Static GNSS surveying	Horizontal: 2.5 mm + 0.5 ppm RMS
	Vertical: 5 mm + 0.5 ppm RMS

**Real Time Kinematic Surveying**

Single Baseline < 30 KM	Horizontal: 8 mm + 1 ppm RMS
	Vertical: 15 mm + 1 ppm RMS
Network RTK <sup>3</sup>	Horizontal: 8 mm + 0.5 ppm RMS
	Vertical: 15 mm + 0.5 ppm RMS
Laser survey	±1cm + 5mm/m ( Tilt height less than 30 ° )

**HARDWARE****PHYSICAL**

Material	Magnesium alloy
Dimensions	120mm*72mm ( without bottom connector 20mm)
weight	0.76kg
Operating temperature	-40°C to + 75°C
Storage temperature	-55°C to + 85°C
Protection IP	IP67 dust proof, protected from 30min immersion to depth of 1m
Shock	Survive a 2m pole drop onto concrete
Vibration	MIL-STD-810G
Humidity	100%, condensing

1- Precision and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, and atmospheric conditions. The specifications stated recommend the use of stable mounts in an open sky view, EMI and multipath clean environment, optimal GNSS constellation configurations. Base lines longer than 30 km require precise ephemeris and occupations up to 24 hours may be required to achieve the high precision static specification.

2- Depends on SBAS system performance

3- Network RTK PPM values are referenced to the closest physical base station and depends on network performances.

**ELECTRICAL**

Power: 9~24 V DC external power input on 5 pin LEMO port  
Support USB Type-C fast charging  
Internal 7000mAh-7.4V lithium-ion battery

Battery Life	Rover Mode: 12 hours
	Base Mode: 7 hours
	Static Mode: 15 hours

**Communication & Data Storage****I/O interface**

LEMO port (5pin)	Supports power input, serial port control, and external radio communication
USB Type-C port	Data download / Charging
Sim card slot	Supports Nano-SIM
Antenna port	UHF antenna interface

**Radio modem**

Transmit power	1/1.5w switchable
Frequency band	410MHz-470MHz; supports to set the frequency
Protocols	TrimTalk450s, SOUTH, Satel,PCC-EOT

**Cellular**

Integrated full frequency multi band 4G modem, supports WCDMA/CDMA2000/TDD-LTE/FDD-LTE

**WIFI**

802.11 b/g standard, access point & client mode, supports access to hotspot for correction transmission

**Bluetooth**

Bluetooth 5.2 Classical/BLE Proprietary double-mode

**Data format**

RTCM2x, RTCM3x, CMR & CMR+, sCMRx  
RINEX, NMEA outputs

**Storage**

64GB internal memory, supports cyclic storage; with ability to collect over one year raw observation based on 5 seconds interval

**Camera**

AR	5M high-definition camera with large viewing angle and support for live scene lofting
Laser assisted	5M high-definition camera, large viewing angle, auxiliary laser measurement and aiming

**Others****System integration**

OS system	Intelligent LINUX operating system
Tilt Compensation	IMU up to 120°(Calibration free)
Supported controllers	All android devices with supported software
<b>Design</b>	
button	Power key
Indicator	Power indicator, data link indicator, satellite indicator, Bluetooth indicator
Voice	Intelligent voice prompts
WEBUI	Support WEBUI configuration

# AR+LASER


Realize Both Offset Point Measurement  
and Stakeout in **MATRIX II**



## AR

### Right to the point with AR real scene stakeout

When the stakeout points are marked directly on the ground, surveyors can easily find the exact location of the stakeout points. By following the arrows on the real-life map, you can stake out points in one go, without having to move the pole back and forth, making the stakeout work more accurate and efficient.

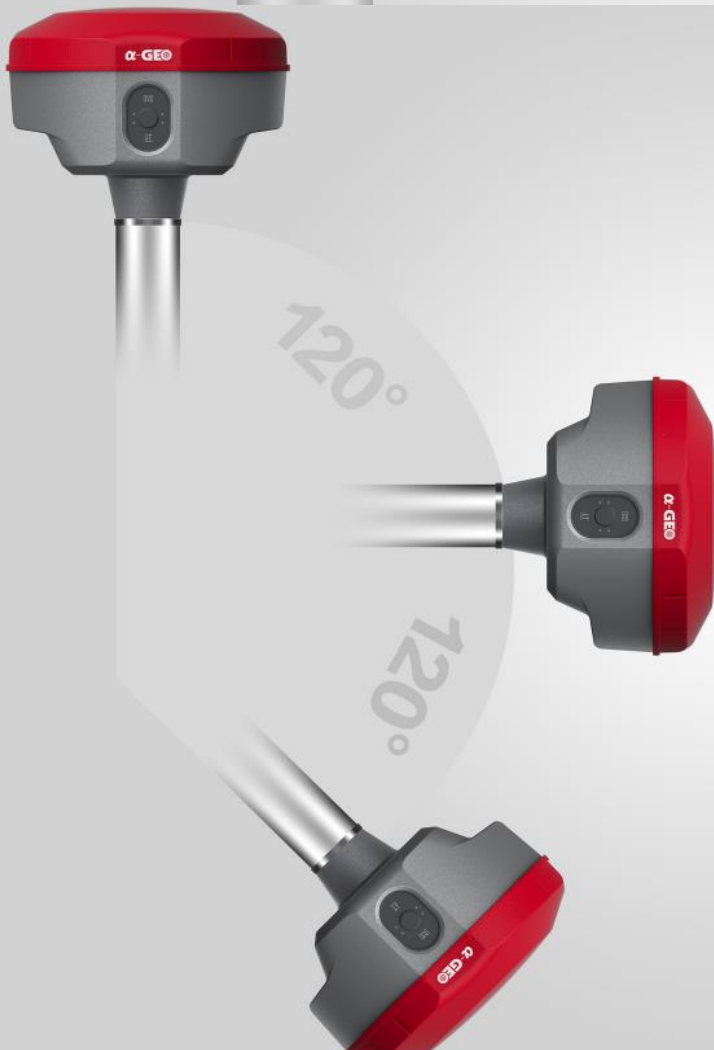

## SUPER IMU

### Super IMU, say goodbye to repeated initialization

Matrix II is equipped with a fast initialization, calibration free and immune to magnetic interference inertial Measurement Unit (IMU). All users can use this technology to collect or stakeout topo points up to 120°



# LASER

## Laser survey opens a new mode of measurement

The world's exclusive patented laser coordinate measurement quick calibration technology can easily achieve centimeter-level measurement accuracy, making measurement more accurate and user-friendly. Besides the camera used in the equipment overcomes the difficulty of aiming under sunlight, making field measurement operations faster and more efficient.



## 64GB SSD

### worry-free storage

Built-in 64GB memory, which can meet most needs of field work. And the feature of cyclic storage helps receiver to automatically remove the previous observation data while there is not enough space in the memory, with this excellent performance, data storage can last almost 4 years based on 5s sampling interval. And the design of embedded memory chip can ensure the safety of observation data.

## MULTI CONSTELLATION

Matrix II with its 1408 channels new generation full GNSS chipset ability to support multiple satellite constellation including GPS, GLONASS, BEIDOU, GALILEO, OZSS, SBAS and IRNSS provides precise and accurate spatial data for all users around the world.











### Authorised Dealer :

K3M GeoEquips Pvt Ltd  
Shop No. B - 4, Ratan Neptune,  
Sr No - 56, Near JSPM College,  
Hadapsar, Pune - 411 028,  
Maharashtra, India

Unlock unparalleled accuracy and efficiency with the Alpha Geo Matrix II Laser GNSS Receiver RTK Set. Whether you're surveying, mapping, or engineering, trust in Alpha Geo Matrix 's cutting-edge technology to elevate your performance to new heights.

#### In The Box

Sr No	Item Description	Quantity
1	Alpha Geo Matrix II Laser Receiver (Rover) 	1
2	Controller : FOIF SurPad with Lifetime Software 	1
3	Carbon Fibre Pole and Bag 	2
4	Transport Case 	2
5	USB Type C Data Cable 	2
6	Adapter 	2
7	Whip Antenna 	1
8	Cradle Connector 	1

Note : The above images are for illustration purpose only, at the time of delivery items may differ.